




Knauf Paper Joint Tape

Knauf Paper Joint Tape is white cellulose paper joint tape for reinforcing joints on walls and ceilings by hand or machine application, to create the strongest joints. It is recommended for use on ceilings and walls to create the strongest joints. Internal corners are made simple with a centreline for easy folding.

Product-Data-Sheet

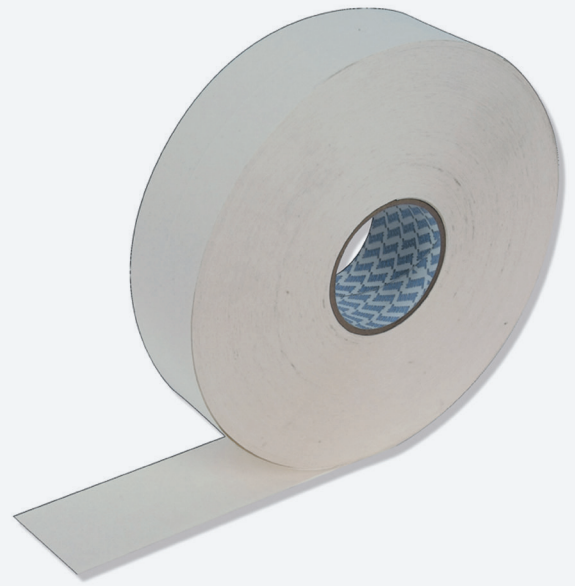

Areas of Application

Ceilings or walls between plasterboard joints, or wherever strong joints are needed. Can be used with powdered or ready mixed jointing compound. Can also be used for patch repair work.

Compliance Standards

EN 13963:2014

Key Benefits

- Helps provide a strong joint to reduce the risk of hairline cracking
- Centreline makes positioning easy, especially internal corners
- Used with Knauf Jointing Products for a complete tape & jointed system

Build on us.

Creation Date: 31/08/2023
Revision Reference: 002
Revision Date: 15/07/2024

Performance Data

Reaction to Fire (R2F)	Flexural Strength (F)	Dangerous Substances (DS)
E, Reaction to Fire with jointing compound Type 3A: A2-s1, d0	NPD	Pass

Technical Information

Width (mm)	Length (m)	Colour	Weight (kg)	Material Number
51	150	White/Cream	1.2	258337

Sustainability

Recyclability

Fully recyclable

Storage and Handling

No special education is required for safe handling. Avoid damp conditions for storage.

Packaging

Packaged in an outer cardboard box.

Disposal/Repair

Any excess leftover product can be saved for another project or recycled in accordance with local authority requirements. Paper Joint Tape which has joint compound on should be disposed of according to the requirements of the joint compound.

Health & Safety

No special precautions are necessary but the use of gloves are recommended during the handling and installation of this product.

Application / Installation

To use to complete tape and jointing finishes to tapered edge plasterboard: Use a minimum of 1mm of Knauf jointing compound (joint filler premium/joint cement premium or fill& finish) to bed the tape and fill to the shoulder of the taper of the plasterboard. Add a liberal coat of Knauf Joint Filler Premium over the top, fill the joint to the shoulder of the taper. Smooth and allow to set. Once set, apply Knauf Joint Cement Premium or Fill & Finish Light over the entire layer to approximately 50mm extra either side of the first coat and leave to dry. Repeat, and when fully dry sand if needed.

Additional Documentation

[Declaration of Performance UKCA](#)

[Declaration of Performance CE](#)

[Safety Data Sheet](#)

Product Accreditations:



Knauf UK GmbH Company Accreditations:



The information given in this publication is believed to be current and accurate as at the date of publication, but no warranty, express or implied is given. Updates will not be automatically issued © Copyright Knauf 2024

Customer Service

UK Tel: 0800 521 050
Eire Tel: 01 4620739
Email: cservice@knauf.com

Technical Service

Tel: 0800 521050 (option 2)
Email: technical-uk@knauf.com
(excluding public holidays)

UK Address

Knauf
Kemsley Fields Business Park
Sittingbourne
Kent ME9 8SR

Ireland Address

Knauf
87 Broomhill Road
Tallaght
Dublin 24
D24 WR85

Creation Date: 31/08/2023
Revision Reference: 002
Revision Date: 15/07/2024